


Carpet Cushion & Hard-Surface Underlayment for commercial flooring



APPLICATION: BROADLOOM CARPET

Double-Glue & Stretch-In

Extra Heavy-Duty
Commercial and
Public Spaces




Tred-MOR® Dubl-Stik® commercial carpet cushion products have been the industry standard since 1985. They're engineered for high-traffic public spaces to keep carpets looking and feeling better, longer. Tred-MOR® adds tensile strength and resiliency while also dramatically reducing the loss of carpet pile height.

Tred-MOR 1562®

Recommended for extra-heavy commercial and public spaces, including institutional areas subject to *continuous* rolling-wheel traffic.

| Product Code | Density | Thickness | Dimensions |
|--------------|---------------------------|-----------|---------------------------------|
| BV0170 | 33.0 lbs./ft ³ | 0.156" | 54" x 30' (15 yd ²) |

Heavy-Duty
Commercial and
Public Spaces




Tred-MOR 2568®

Recommended for heavy commercial and public spaces, including institutional areas subject to *periodic* rolling-wheel traffic.

| Product Code | Density | Thickness | Dimensions |
|--------------|---------------------------|-----------|---------------------------------|
| BV0175 | 22.0 lbs./ft ³ | 0.250" | 54" x 30' (15 yd ²) |

Extra Heavy-Duty
Commercial and
Public Spaces




Tred-MOR 2580®

Recommended for extra-heavy commercial and public spaces, including institutional areas subject to *frequent* rolling-wheel traffic.

| Product Code | Density | Thickness | Dimensions |
|--------------|---------------------------|-----------|---------------------------------|
| BV0179 | 26.0 lbs./ft ³ | 0.250" | 54" x 30' (15 yd ²) |

Maritime



PAD-LOC MARITIME CARPET SUPPORT®

Pad-Loc is a maritime carpet-support cushion that dramatically reduces carpet wear and extends appearance retention. It is 65% lighter than comparable products and features a low-profile design that provides excellent door clearance. Pad-Loc rebond cushion is excellent for reducing airborne and impact-noise transmission and helps reduce body stress and fatigue. It also includes Fresh Dimension® antimicrobial that works to inhibit the growth of mold, mildew, and odor-causing bacteria. Complies with SOLAS and U.S. Coast Guard requirements.

| Product Code | Density | Thickness | Dimensions |
|--------------|---------------------------|-----------|--------------------------------|
| BZ0465 | 11.5 lbs./ft ³ | 0.180" | 6' x 60' (40 yd ²) |

APPLICATION: BROADLOOM CARPET

Stretch-In

- Meeting Rooms
- Offices
- Dorms
- Retail Spaces



FIBERTEK™ CARPET CUSHION

FiberTek™ is made from 100% pre-consumer synthetic fiber and will not support the growth of mold or mildew. FiberTek™ has excellent thermal insulation and acoustical properties, and provides comfort underfoot with less fatiguing than direct-glue-down installations. It is designed for use in commercial applications such as offices, meeting rooms, dorm rooms, retail space, healthcare facilities, etc.

FiberTek™ 24

| Product Code | Density | Thickness | Dimensions |
|--------------|--------------------------|-----------|---------------------------------|
| 6E0686 | 7.7 lbs./ft ³ | 0.260" | 6' x 60' (40 yd ²) |
| 6E0687 | 7.7 lbs./ft ³ | 0.260" | 12' x 60' (80 yd ²) |

FiberTek™ 28

| Product Code | Density | Thickness | Dimensions |
|--------------|--------------------------|-----------|---------------------------------|
| 6E0692 | 8.1 lbs./ft ³ | 0.285" | 6' x 60' (40 yd ²) |
| 6E0693 | 8.1 lbs./ft ³ | 0.285" | 12' x 60' (80 yd ²) |

FiberTek™ 32

| Product Code | Density | Thickness | Dimensions |
|--------------|--------------------------|-----------|---------------------------------|
| 6E0690 | 8.2 lbs./ft ³ | 0.325" | 6' x 60' (40 yd ²) |
| 6E0691 | 8.2 lbs./ft ³ | 0.325" | 12' x 60' (80 yd ²) |

FiberTek™ 40

| Product Code | Density | Thickness | Dimensions |
|--------------|--------------------------|-----------|---------------------------------|
| 6E0688 | 8.8 lbs./ft ³ | 0.380" | 6' x 60' (40 yd ²) |
| 6E0689 | 8.8 lbs./ft ³ | 0.380" | 12' x 60' (80 yd ²) |



Valencia™


Valencia™ improves the comfort of carpet while providing insulation and reducing noise. This durable, yet pliable, option includes a variety of features and benefits that add to the overall quality of the product.

| Product Code | Density | Thickness | Dimensions |
|--------------|-------------------------|-----------|----------------------------------|
| BV0255 | 21 lbs./ft ³ | 0.415" | 4.5' x 24' (12 yd ²) |



APPLICATION: CARPET TILE

- Modular Carpet Tile
- Modular Composite Tile



CARPET TILE CUSHION


Carpet Tile Cushion is a subfloor surface liner designed to be installed under modular carpet tile. The product rolls out onto the subfloor, creating a sound and moisture barrier while also offering premium comfort. Becomes a "clean-start" liner between the subfloor and finished floor, leveling out any minor irregularities. It can be installed on, above, or below grade.

| Product Code | Density | Thickness | Dimensions |
|--------------|---------------------------|-----------|---------------------------------|
| BV0341 | 33.0 lbs./ft ³ | 0.156" | 54" x 30' (15 yd ²) |


APPLICATION: LAMINATE/HARDWOOD & LUXURY VINYL/WPC/SPC



- Luxury Vinyl/WPC/SPC w/ Attached Back
- Laminate
- Engineered and Solid Hardwood Flooring

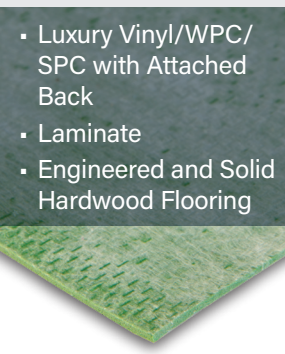

- Luxury Vinyl/WPC/SPC with Attached Back
- Laminate
- Engineered and Solid Hardwood Flooring

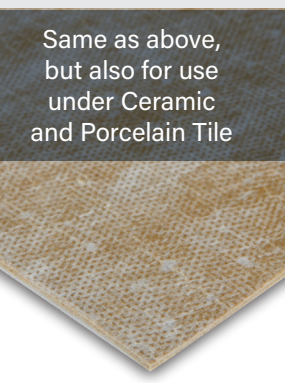

Same as above, but also for use under Ceramic and Porcelain Tile

SCOTCHGARD® GUARDIAN

Scotchgard™ Guardian acoustical underlayment features high-performance synthetic fiber for premium protection under today's most popular flooring types. Guardian significantly reduces impact and airborne noise while providing long-term comfort and support.

| Product Code | Density | Thickness | Dimensions |
|--------------|-----------------------------|---------------|--------------|
| BM0096 | 13.5 lbs./ft³ or 42 oz./yd² | 0.080" (2 mm) | 36" x 33.33' |
| BM0097 | 13.5 lbs./ft³ or 42 oz./yd² | 0.080" (2 mm) | 72" x 60' |

WHISPER STEP®

Whisper Step® acoustical underlayment reduces impact and airborne noise. Features Block-Out® moisture guard and Fresh Dimension® antimicrobial, which works to help inhibit the growth of mold, mildew, and odor-causing bacteria. Whisper Step's extreme density not only resists compression but is guaranteed to not crush. Recommended by the Radiant Professionals Alliance as an excellent choice for use over in-floor heating.

| Product Code | Density | Thickness | Dimensions |
|--------------|---------------|------------------|------------------------|
| BM0042 | 62.0 lbs./ft³ | 0.056" (1.42 mm) | 36" x 33.33' (100 ft²) |
| BM0040 | 62.0 lbs./ft³ | 0.056" (1.42 mm) | 54" x 44' (200 ft²) |

ACI-125™ - Ceramic and Porcelain

ACI-125™ acoustical crack isolation membrane features extreme density for unmatched support. Pliable rubber composition allows movement to reduce stress from the concrete slab to the tile installation. Protects against horizontal, in-plane, slab substrate cracks up to 1/8". Features Block-Out® moisture guard and Fresh Dimension® antimicrobial to help inhibit the growth of mold, mildew, and odor-causing bacteria. Recommended by the Radiant Professionals Alliance as an excellent choice for use over in-floor heating.

| Product Code | Density | Thickness | Dimensions |
|--------------|-------------|-----------------|------------------------|
| BM0087 | 66 lbs./ft³ | 0.051" (1.3 mm) | 36" x 33.33' (100 ft²) |
| BM0088 | 66 lbs./ft³ | 0.051" (1.3 mm) | 54" x 44.44" (200 ft²) |

APPLICATION: AREA RUG



Area Rugs

FIRMGRIP™

FirmGrip™ area rug cushion keeps area rugs in place and provides a luxurious foundation. FirmGrip™ is great in high-traffic areas, under heavy furniture, and can be used on hard surfaces or carpeted floors.

| Product Code | Density | Thickness | Dimensions |
|--------------|---------------|-----------|--------------------|
| 6E0441 | 12.5 lbs./ft³ | 0.300" | 6' x 60' (40 yd²) |
| 6E0429 | 12.5 lbs./ft³ | 0.300" | 12' x 60' (80 yd²) |

Contact your Leggett & Platt® Flooring Products consultant to get started.
Call 800.475.0010 or visit LPFlooringProducts.com

Leggett & Platt®
 FLOORING PRODUCTS